

Specification

Power Supply 1 : AC100-240V 50/60HZ

Power Supply 2 : DC12V 3A

Power Consumption : 30W

LED 1 : 1 x 15W RGBW 4-in-1 LED

LED 2 : 36 x 5050 RGB 3-in-1 LED

LED 3 : 1 x 150mA Green laser

Modes: DMX512, Auto, Master-Slave, Sound Activated


DMX Channel : 15CH

LED Stage Lighting Operating Manual

Mini beam light with led belt and laser



MENU:

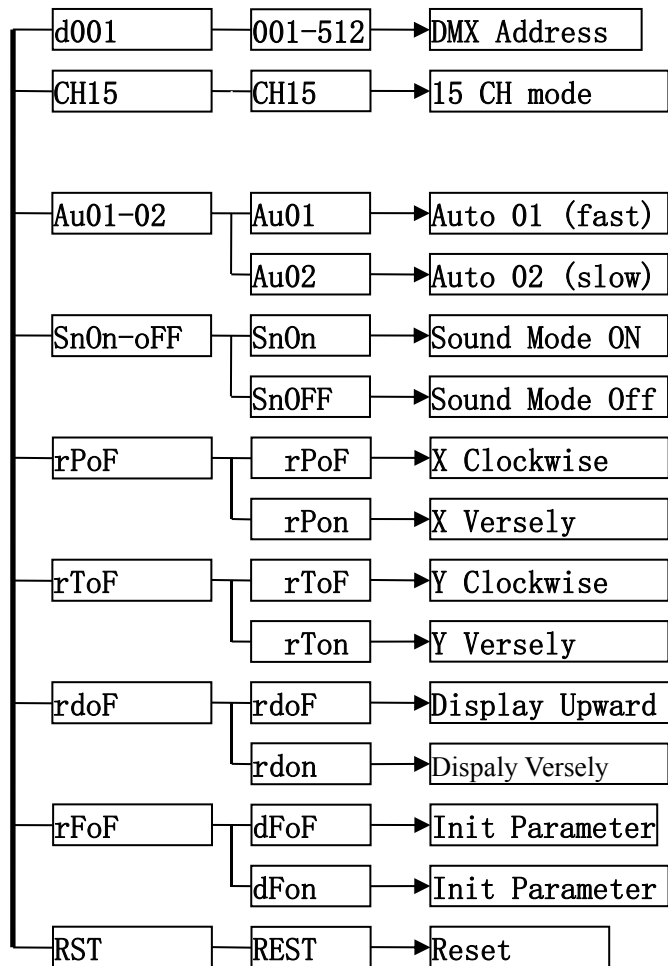

DMX512 description:

15CH Mode

Channel		Function
1	0-255	Pan rotation
2	0-255	Pan, fine-tuning
3	0-255	Tilt
4	0-255	Tilt, fine-tuning
5	0-255	Auto Speed
6	0-255	Master dimmer
7	0-255	Strobe speed
8	0-255	Red dimmer
9	0-255	Green dimmer
10	0-255	Blue dimmer
11	0-255	White dimmer
12	0-255	Laser dimmer
13	0-255	0-30 none 31-127 Auto 1 (fast) 128-249 Auto 2 (slow) 250-255 Sound Activated
14	0-255	0-18 Led belt off 19-109 Led belt color selection 110-255 Led belt auto function
15	0-255	0-249 None 250-255 Reset